




MT3515

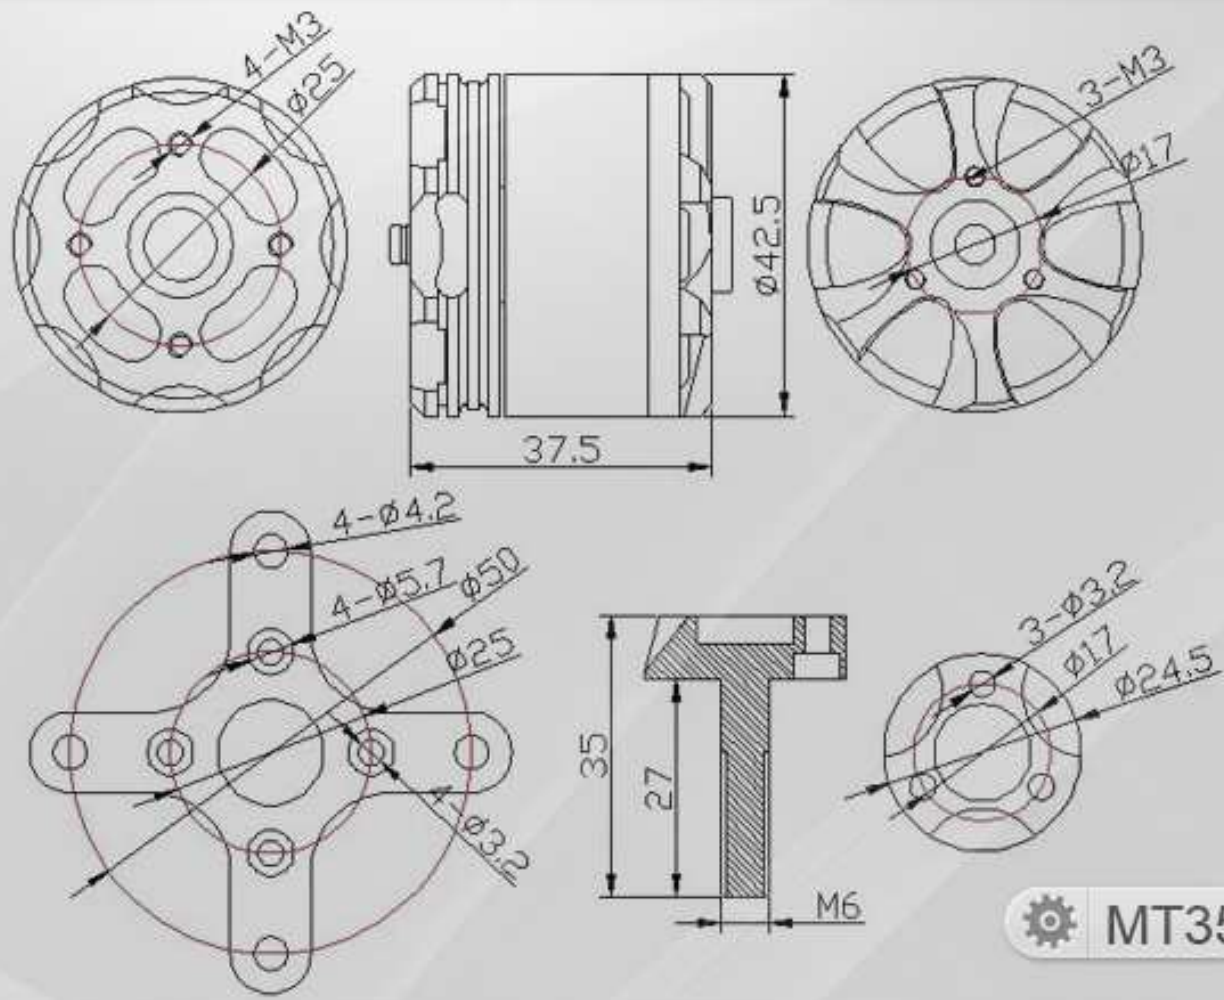

MT3515

Item No.	Volts (V)	Prop	Throttle	Amps (A)	Watts (W)	Thrust (g)	RPM	Efficiency (g/W)	Operating temperature(°C)
MT3515 KV400	22.2	T-MOTOR 14*4.8CF	50%	3.4	76	780	4300	10.26	45
			65%	6.3	140	1180	5400	8.43	
			75%	8.5	192	1480	5900	7.71	
			85%	11.4	255	1800	6500	7.06	
			100%	13.7	301	2010	6950	6.68	
		T-MOTOR 15*5CF	50%	4.3	87	970	4200	11.15	50
			65%	7.9	177	1470	5200	8.31	
			75%	11.6	254	1880	5700	7.40	
			85%	14.5	322	2200	6200	6.83	
			100%	17.2	376	2460	6500	6.54	
		T-MOTOR 16*5.4CF	50%	5.2	117	1180	4050	10.09	59
			65%	9.4	210	1730	4850	8.24	
			75%	13	288	2100	5400	7.29	
			85%	16.9	372	2630	5850	7.07	
			100%	20	437	2830	6250	6.48	

Notes: The test condition of temperature is motor surface temperature in 100% throttle while the motor run 10 min.





T-MOTOR
HIGH PERFORMANCE BRUSHLESS MOTORS



T-MOTOR
HIGH PERFORMANCE BRUSHLESS MOTORS



T-MOTOR
HIGH PERFORMANCE BRUSHLESS MOTORS



