




Item No.	Volts (V)	Prop	Throttle	Amps (A)	Watts (W)	Thrust (g)	RPM	Efficiency (g/W)	Operating temperature(°C)
MN1804 KV2400	7.4	T-MOTOR 5*3	50%	1.7	13	92	9600	7.31	20
			65%	2.2	16	113	10800	6.94	
			75%	3	22	144	12000	6.49	
			85%	4	30	177	13300	5.98	
			100%	4.8	36	203	14000	5.72	
		T-MOTOR 6*2	50%	1.9	14	119	8600	8.46	30
			65%	2.7	20	155	9800	7.76	
			75%	3.7	27	197	11000	7.20	
			85%	5	37	240	12100	6.49	
			100%	6	44	273	13000	6.15	
		T-MOTOR 7*2.4	50%	2.5	19	141	6900	7.62	43
			65%	4.1	30	206	8300	6.79	
			75%	5.3	39	246	9000	6.27	
			85%	7.1	53	283	9700	5.39	
			100%	8	59	308	10100	5.20	
	11.1	T-MOTOR 5*3	50%	2.5	28	159	12500	5.73	45
			65%	3.9	43	215	14500	4.97	
			75%	5.4	60	274	16400	4.57	
			85%	7.1	79	324	17400	4.11	
			100%	8.4	93	358	18500	3.84	

Notes:The test condition of temperature is motor surface temperature in 100% throttle while the motor run 10 min.



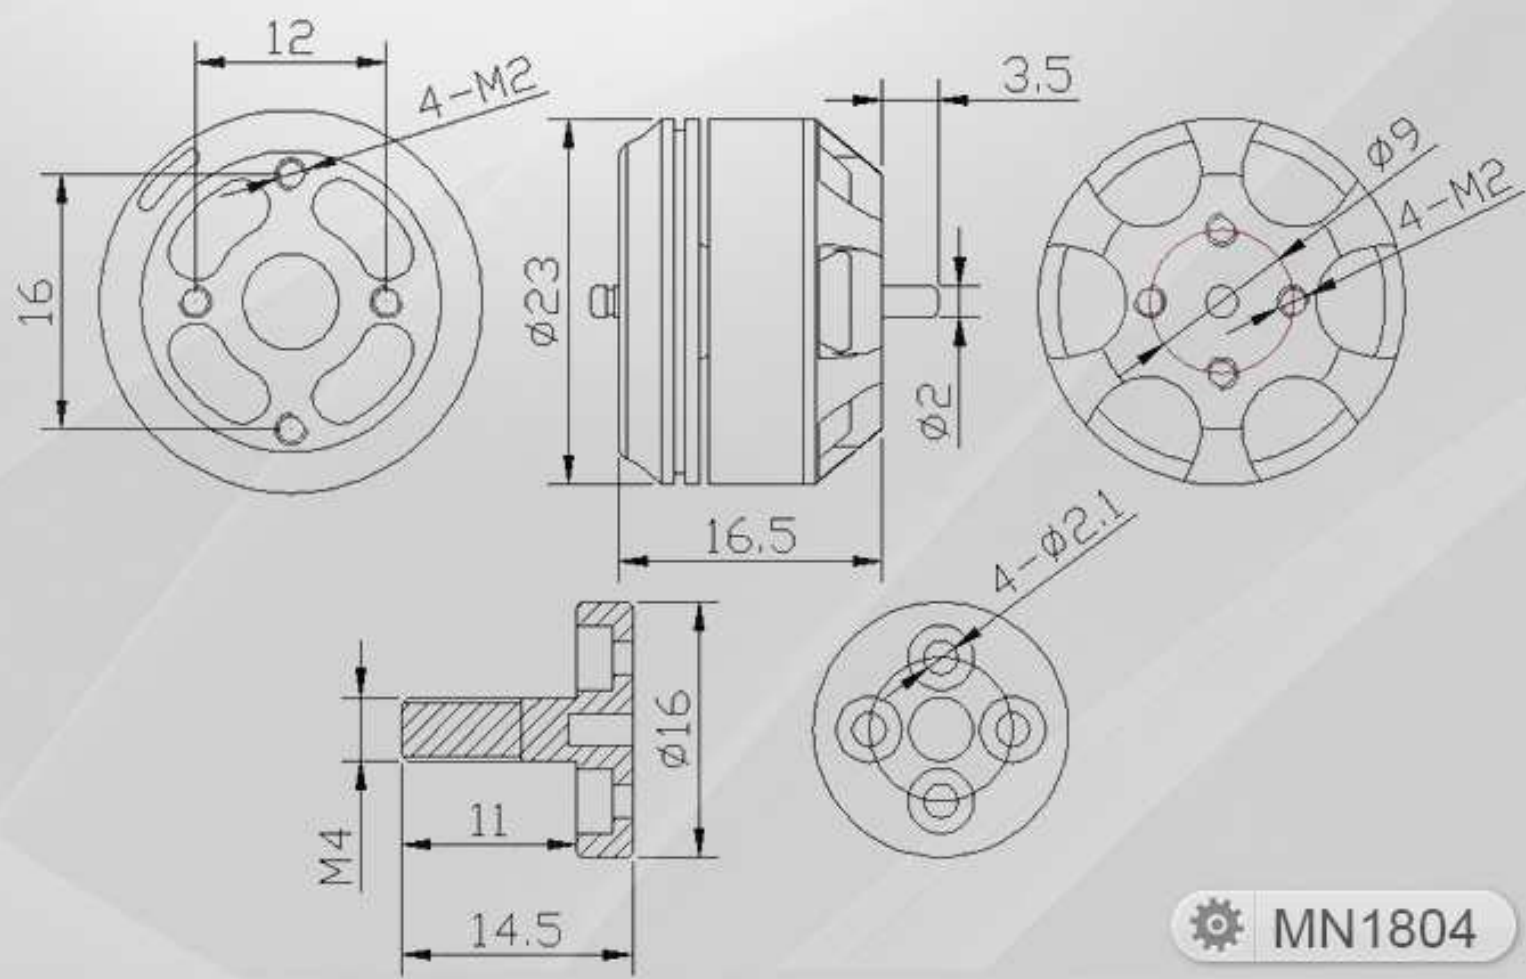

T-MOTOR
HIGH PERFORMANCE BRUSH-LESS MOTORS




T-MOTOR
HIGH PERFORMANCE BRUSHLESS MOTORS



NAVIGATOR SERIES
Z-MOTOR
MN1804-20 KV:2400
MADE IN CHINA
RoHS

Z-MOTOR
HIGH PERFORMANCE BRUSHLESS MOTORS

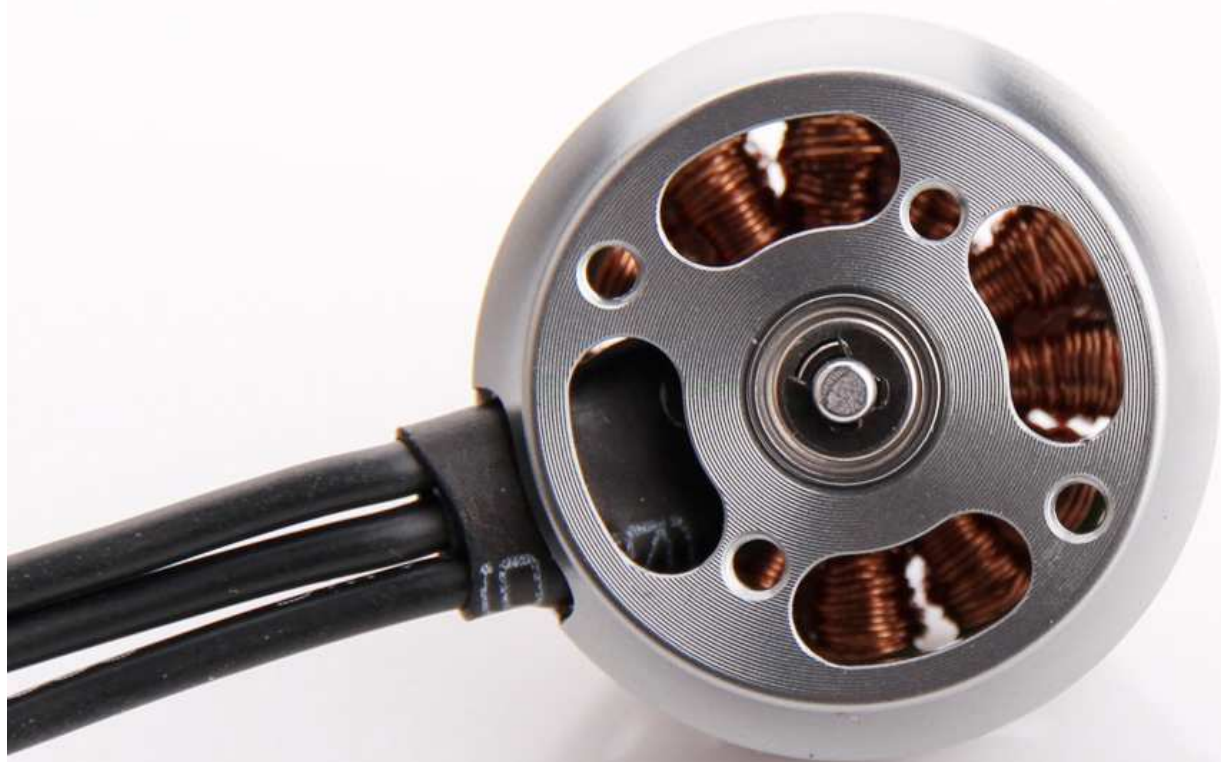

T-MOTOR
HIGH PERFORMANCE BRUSHLESS MOTORS



Z-MOTOR
HIGH PERFORMANCE BRUSHLESS MOTORS



T-MOTOR
HIGH PERFORMANCE BRUSHLESS MOTORS





T-MOTOR
HIGH PERFORMANCE BRUSHLESS MOTORS

