






Samguk Series WU

2700KV / 2400KV







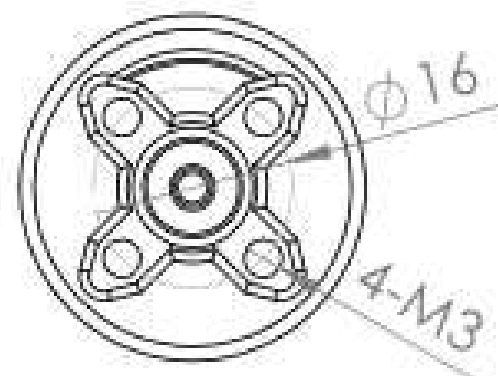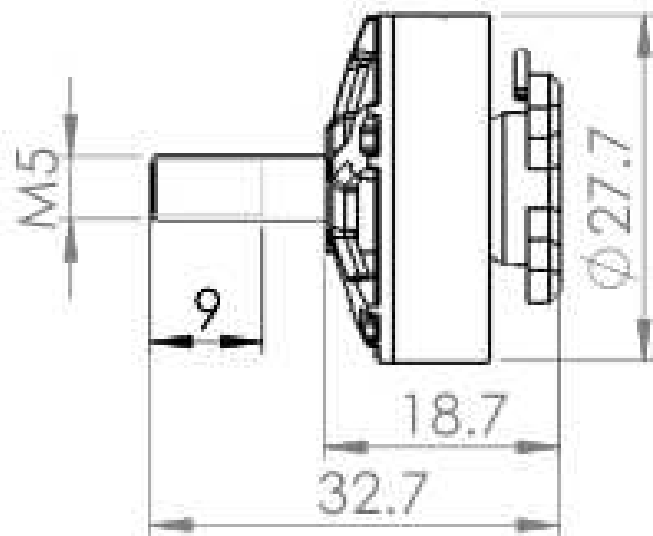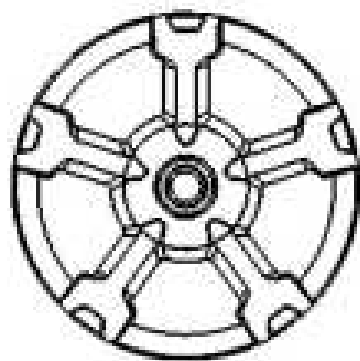

MOTOR TECHNICAL DATA:

	NO LOAD		ON LOAD				LOAD TYPE
VOLTAGE	CURRENT	SPEED	CURRENT	Pull	Power	EEP	Battery/prop
V	A	rpm	A	g	W	%	
12	1.1	28800	3.4	150	40.8	3.7	LiPox3/4045x3
			8.8	300	105.6	2.8	
			18.4	530	220.8	2.4	
			3.8	200	45.6	4.4	LiPox3/5040x3
			9	400	108.0	3.7	
			17.5	640	210.0	3.0	
			4	200	48.0	4.2	LiPox3/5045x3
			10.2	400	122.4	3.3	
			24.8	710	297.6	2.4	
			3.7	200	44.4	4.5	LiPox3/5040x4
			9.5	400	114.0	3.5	
			19.6	670	235.2	2.8	
			3.6	200	43.2	4.6	LiPox3/5045
			8.8	400	105.6	3.8	
			15.8	610	189.6	3.2	
16	1.2	38400	4.0	200	64.0	3.1	LiPox4/4045x3
			10.4	400	166.4	2.4	
			27.3	790	436.8	1.8	
			5.3	300	84.8	3.5	LiPox4/5040x3
			13.4	600	214.4	2.8	
			25.2	920	403.2	2.3	
			5.7	300	91.2	3.3	LiPox4/5045x3
			15.8	600	252.8	2.4	
			32.7	940	523.2	1.8	
			5.3	300	84.8	3.5	LiPox4/5040x4
			13.8	600	220.8	2.7	
			28.7	1000	459.2	2.2	
			4.9	300	78.4	3.8	LiPox4/5045
			12.5	600	200.0	3.0	
			23.7	940	379.2	2.5	