



Samguk Series Shu




2500KV / 2800KV









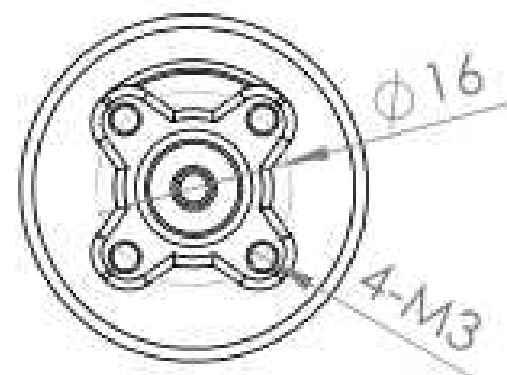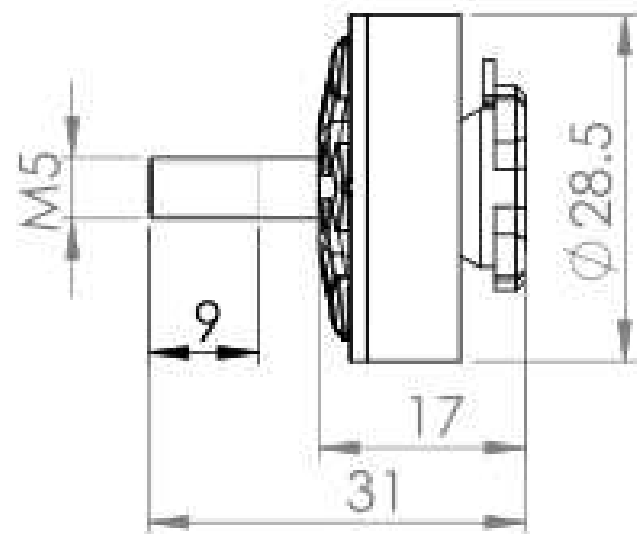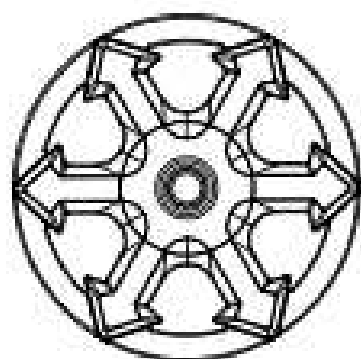

MOTOR TECHNICAL DATA:

	NO LOAD		ON LOAD				LOAD TYPE
VOLTAGE	CURRENT	SPEED	CURRENT	Pull	Power	EEP	Battery/prop
V	A	rpm	A	g	W	%	
12	1.2	30000	5.3	200	63.6	3.1	LiPox3/4045x3
			13.3	400	159.6	2.5	
			22.7	580	272.4	2.1	
			5.7	250	68.4	3.7	LiPox3/5045x4
			14.2	500	170.4	2.9	
			31.6	800	379.2	2.1	
			5.1	250	61.2	4.1	LiPox3/5040x3
			12.2	500	146.4	3.4	
			21.6	720	259.2	2.8	
			5.2	250	62.4	4.0	LiPox3/5040x3
			12.9	500	154.8	3.2	
			23.8	750	285.6	2.6	
			4.9	250	58.8	4.3	LiPox3/5045
			11.9	500	142.8	3.5	
			19.6	700	235.2	3.0	
16	1.3	40000	6.9	300	110.4	2.7	LiPox4/4045x3
			18.4	600	294.4	2.0	
			33.3	880	532.8	1.7	
			8.7	400	139.2	2.9	LiPox4/5045x4
			24.8	800	396.8	2.0	
			44.1	1100	705.6	1.6	
			7.4	400	118.4	3.4	LiPox4/5040x3
			20.8	800	332.8	2.4	
			32.8	1200	524.8	2.3	
			7.4	400	118.4	3.4	LiPox4/5040x3
			20.9	800	334.4	2.4	
			35.0	1100	560.0	2.0	
			6.4	350	102.4	3.4	LiPox4/5045
			15.6	700	249.6	2.8	
			29.3	1060	468.8	2.3	