






Samguk Series WU

2700KV / 2400KV







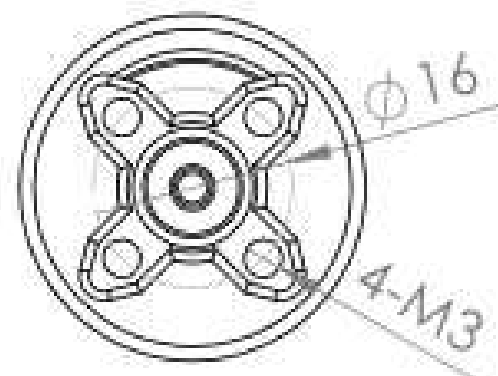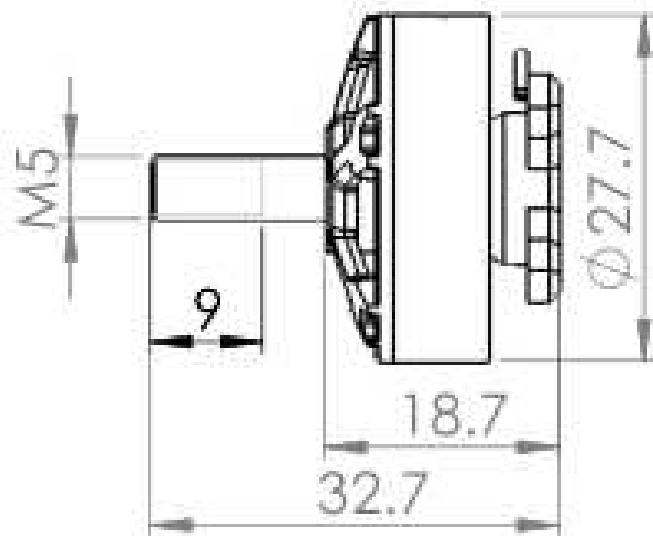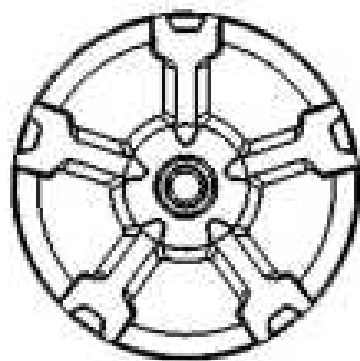

MOTOR TECHNICAL DATA:

	NO LOAD		ON LOAD				LOAD TYPE
VOLTAGE	CURRENT	SPEED	CURRENT	Pull	Power	EEP	Battery/prop
V	A	rpm	A	g	W	%	
12	1.4	32400	5.3	200	63.6	3.1	LiPox3/4045x3
			12.9	400	154.8	2.6	
			24.8	630	297.6	2.1	
			4.8	250	57.6	4.3	LiPox3/5040x3
			13	500	156.0	3.2	
			22.6	730	271.2	2.7	
			7.8	300	93.6	3.2	LiPox3/5045x3
			16.5	500	198.0	2.5	
			31.0	700	372.0	1.9	
			5.2	250	62.4	4.0	LiPox3/5040x4
			13.1	500	157.2	3.2	
			25.0	770	300.0	2.6	
			5.3	250	63.6	3.9	LiPox3/5045
			12.6	500	151.2	3.3	
			20.6	700	247.2	2.8	
16	1.5	43200	7.2	300	115.2	2.6	LiPox4/4045x3
			19.1	600	305.6	2.0	
			34.8	900	556.8	1.6	
			7.5	400	120.0	3.3	LiPox4/5040x3
			20.6	800	329.6	2.4	
			33.1	1100	529.6	2.1	
			8.8	400	140.8	2.8	LiPox4/5045x3
			27.8	800	444.8	1.8	
			43.2	1130	691.2	1.6	
			7.8	400	124.8	3.2	LiPox4/5040x4
			22.5	800	360.0	2.2	
			35.2	1140	563.2	2.0	
			6.4	350	102.4	3.4	LiPox4/5045
			15.8	700	252.8	2.8	
			29.9	1070	478.4	2.2	