



Samguk Series Shu




2500KV / 2800KV









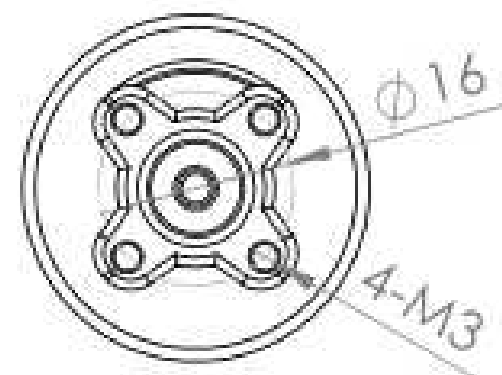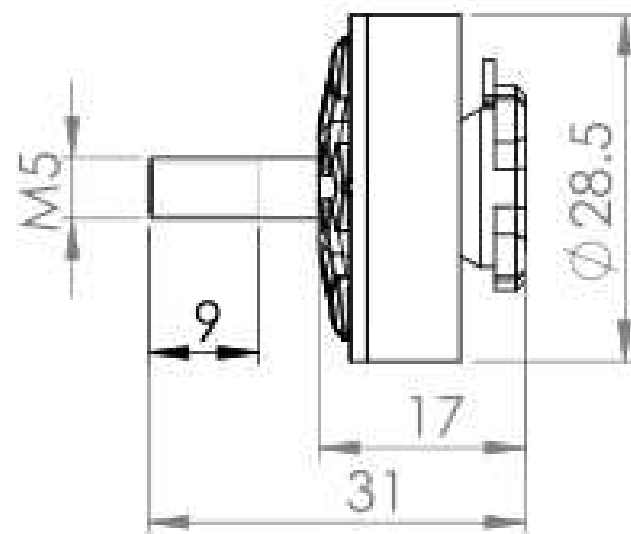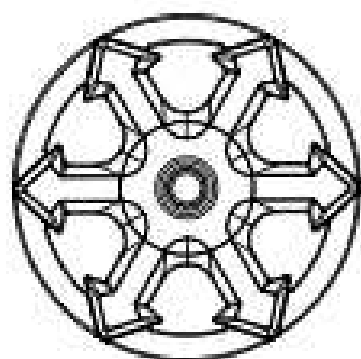

MOTOR TECHNICAL DATA:

	NO LOAD		ON LOAD				LOAD TYPE
VOLTAGE	CURRENT	SPEED	CURRENT	Pull	Power	EEP	Battery/prop
V	A	rpm	A	g	W	%	
12	1.6	33600	5.4	200	64.8	3.1	LiPox3/4045x3
			13.7	400	164.4	2.4	
			29.3	660	351.6	1.9	
			6.8	300	81.6	3.7	LiPox3/5040x3
			17.3	600	207.6	2.9	
			27.5	820	330.0	2.5	
			7.8	300	93.6	3.2	LiPox3/5045x3
			21.2	600	254.4	2.4	
			38.0	860	456.0	1.9	
			6.8	300	81.6	3.7	LiPox3/5040x4
			18.7	600	224.4	2.7	
			29.5	820	354.0	2.3	
			5.2	250	62.4	4.0	LiPox3/5045
			13.1	500	157.2	3.2	
			24.4	770	292.8	2.6	
16	1.8	44800	7.3	300	116.8	2.6	LiPox4/4045x3
			21.0	600	336.0	1.8	
			42.0	970	672.0	1.4	
			6.5	350	104.0	3.4	LiPox4/5040x3
			18.4	700	294.4	2.4	
			39.5	1100	632.0	1.7	
			8.2	350	131.2	2.7	LiPox4/5045x3
			25.2	700	403.2	1.7	
			42.0	1060	672.0	1.6	
			7.1	350	113.6	3.1	LiPox4/5040x4
			19.4	700	310.4	2.3	
			38.4	1070	614.4	1.7	
			6.9	350	110.4	3.2	LiPox4/5045
			17.4	700	278.4	2.5	
			32.4	1060	518.4	2.0	